

LAMIR R IP44



Downlights



LAMIR R 9 IP44 3000K / 4000K

LED integrated

voltage: 230V	LED 9W 700lm 3000K		
IP44	LED 9W 700lm 4000K		
technical specification	installation place <input type="checkbox"/> inlet opening 6,8cm		
	beam angle: 120°		

COLOUR / NEW INDEX NO.

- 3000K WHITE (WH) **AZ4384**
- 4000K WHITE (WH) **AZ4383**




LAMIR R 12 IP44 3000K / 4000K

LED integrated


voltage: 230V	LED 16W 1300lm 3000K		
IP44	LED 16W 1300lm 4000K		
technical specification	installation place <input type="checkbox"/> adj. inlet: 7,5÷9,6cm		
	beam angle: 120°		

COLOUR / NEW INDEX NO.

- 3000K WHITE (WH) **AZ4385**
- 4000K WHITE (WH) **AZ4386**



Adjusting the position of the wings in relation to the diameter of the hole, the range of the size of the hole from (inlet opening)

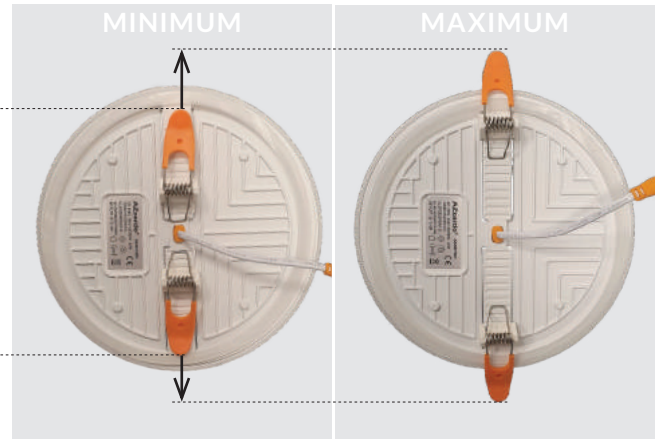

Lamir R9 – no adjustable wings

Lamir R12 (adjustable the position of the wings) – 7,5÷9,6cm

Lamir R17 and S17 (adjustable the position of the wings) – 7,4÷15,1cm

* - EXPLANATION SHORTCUT PAGE 2 (E)